



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

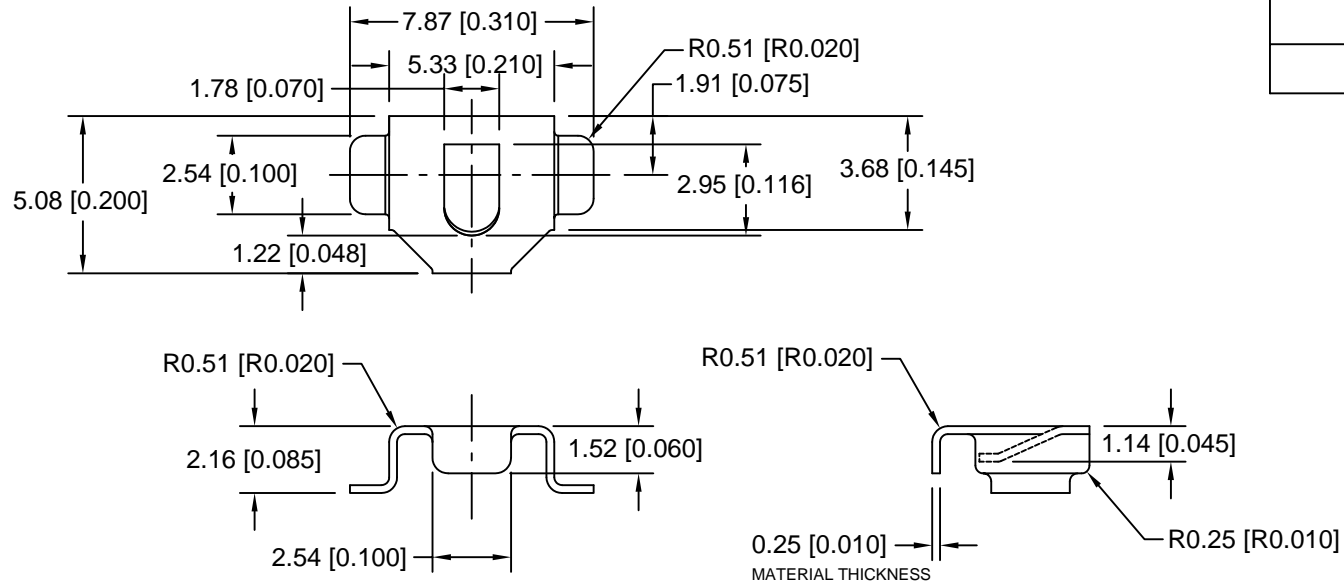


NOTES:


- MATERIAL:  
0.25mm PHOSPHOR BRONZE 1/2H, NICKLE PLATED 40U"-120U"
- ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)	Title ML414 BATTERY CONTACT		
Angular ± 3°	Date 2/27/09	Drawing Number BK-414	
		Approved By T.B.	

Date	SYM	REVISION RECORD	AUTH	DR.	CK.

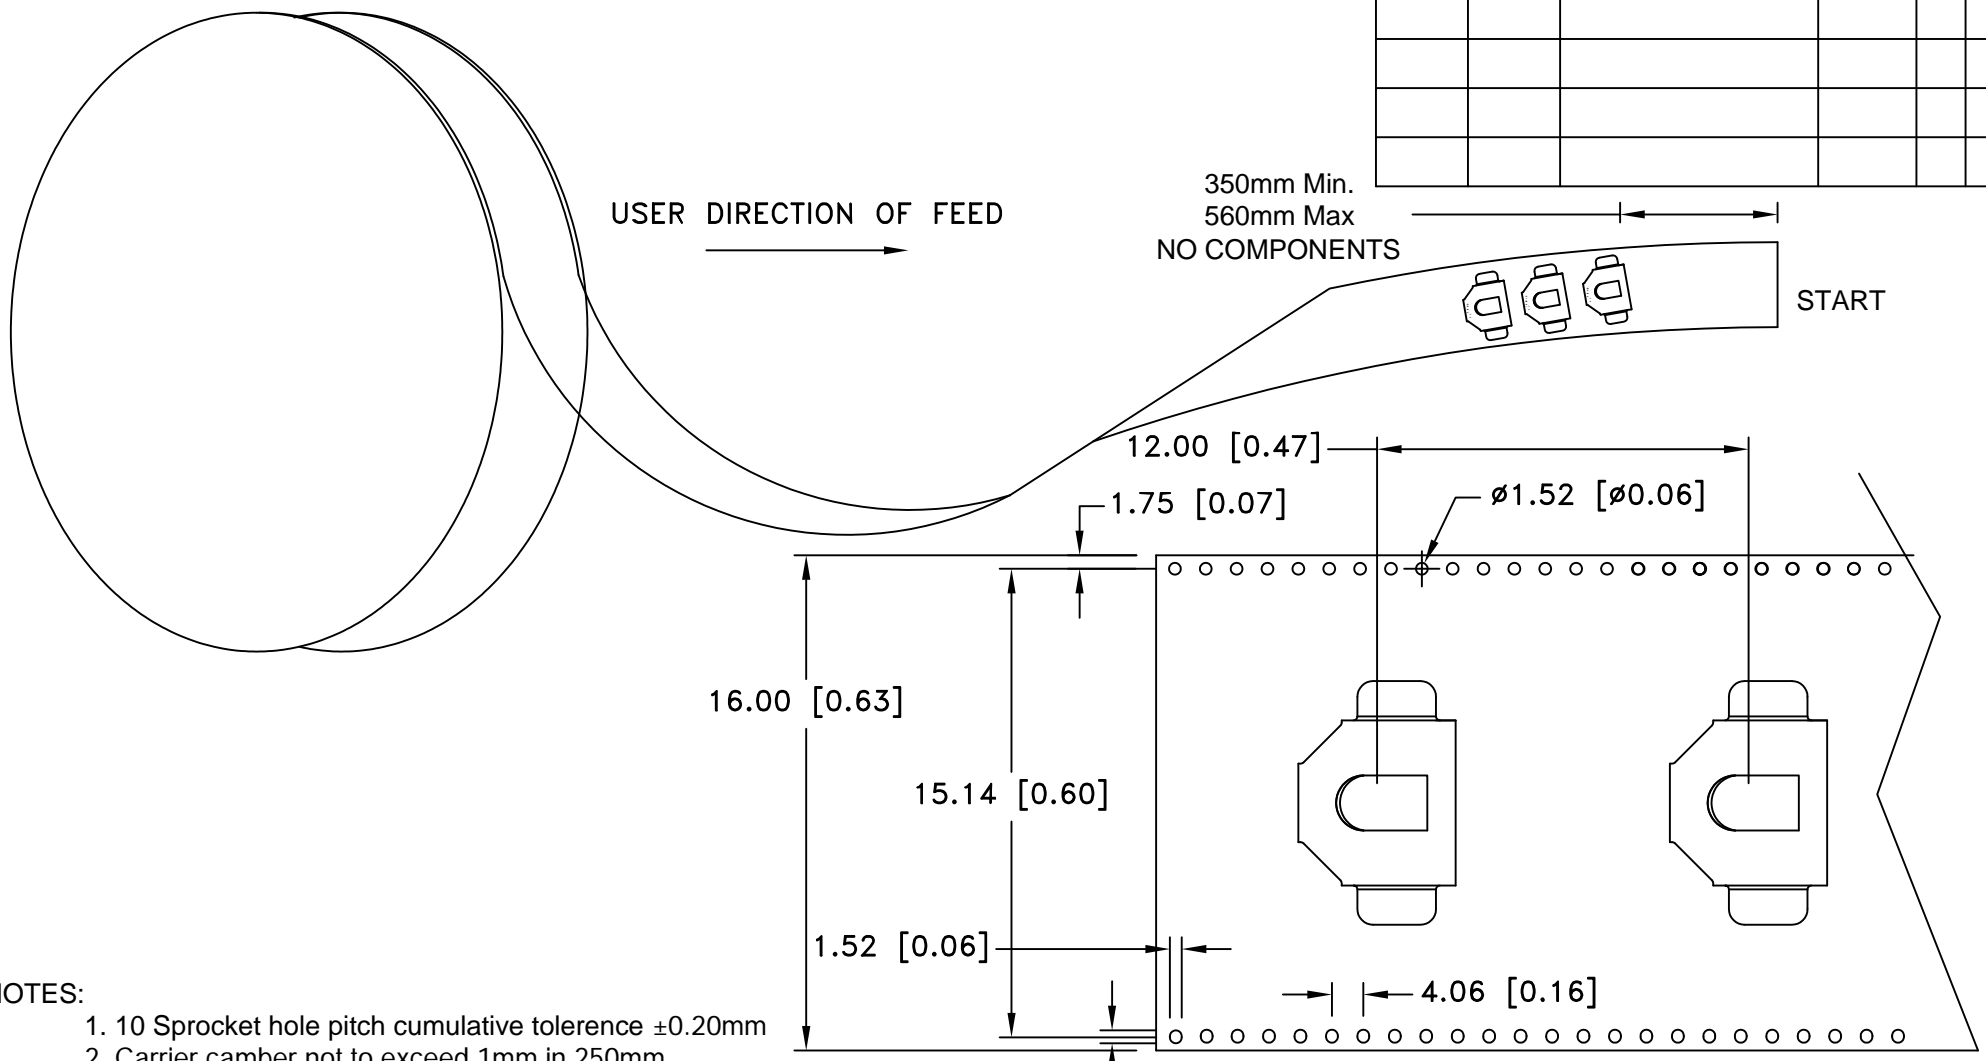

- NOTES:
1. 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20$ mm
  2. Carrier camber not to exceed 1mm in 250mm
  3. Material: Transparent Anti-static Polystyrene
  4. Thickness:  $0.35 \pm 0.05$ mm
  5. Component loader per per 13" reel: 2000 pcs
  6. All dimensions per EIA-481-2A

1.68 [0.07] (Except as noted)		Memory Protection Devices, Inc	
		200 Broad Hollow Road, Farmingdale, New York 11735	
decimal		Scale	Drawn By B.S.
$\pm .5$ (.020)			Approved By T.B.
Fractional	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER		
$\pm .8$ (.030)	Date	Drawing Number	
Angular	2/27/09	BK-414-TR-99	
$\pm 3^\circ$			